

Feeds and Speeds for RAKU[®] TOOL WB-0801



formula for calculating speed (spindle)

$$n = \frac{V_c \times 12,0001}{D_c \times \pi}$$

$$15715 \text{ [rpm]} = \frac{3084 \text{ [ft/min]} \times 12,0001}{\frac{3}{4} \text{ [in]} \times 3,14}$$

formula for calculating axis feed rate

$$V_f = n \times f_z \times z_n$$

$$619 \text{ [in/min]} = 15715 \text{ [rpm]} \times 0,0197 \text{ [in]} \times 2 \text{ [number]}$$

recommended cutting data for roughing

parameter	symbol	unit
radial infeed:	a_e	[in]
axial infeed:	a_p	[in]
number of teeth:	Z_n	[number]

roughing recommendation		
min.	ideal	max.
- x D_c	0.50 x D_c	0.80 x D_c
0.10 x D_c	1.00 x D_c	2.00 x D_c
1	2	4

recommended cutting data for finishing

parameter	symbol	unit
radial infeed:	a_e	[in]
axial infeed:	a_p	[in]
number of teeth:	Z_n	[number]

finishing recommendation		
min.	ideal	max.
- x D_c	0.01 x D_c	0.10 x D_c
0,01 x D_c	0.10 x D_c	0.50 x D_c
1	2	4

validated cutting data for roughing

Type	D_c [in]	Z_n [number]	V_c [ft/min]	f_z [in]	n [rpm]	V_f [in/min]	a_e [in]	a_p [in]	L_1 [in]	L_2 [in]
torus	$\frac{3}{4}$	2	3084	0,0197	15.715	619	0,394	0,787	3,386	0,787
torus	$\frac{1}{2}$	2	1837	0,0189	14.043	531	0,236	0,472	2,165	0,630
torus	$\frac{1}{4}$	2	919	0,0189	14.043	531	0,118	0,236	0,906	0,315

validated cutting data for finishing

Type	D_c [in]	Z_n [number]	V_c [ft/min]	f_z [in]	n [rpm]	V_f [in/min]	a_e [in]	a_p [in]	L_1 [in]	L_2 [in]
ball	$\frac{3}{4}$	2	3084	0,0240	15.715	755	0,008	0,079	2,638	0,669
ball	$\frac{1}{2}$	2	1837	0,0240	14.043	675	0,005	0,047	2,047	0,413
ball	$\frac{1}{4}$	2	919	0,0240	14.043	675	0,002	0,024	0,906	0,394

parameter	symbol	unit
cutting speed:	V_c	[ft/min]
feed/tooth:	f_z	[in]

speed (spindle):	n	[rpm]
axis feed rate:	V_f	[in/min]

cutting diameter:	D_c	[in]
tool total length:	L_0	[in]
tool unclamping length:	L_1	[in]
tool cutting length:	L_2	[in]

user specifications
selection in the diagram
selection in the diagram

calculation by user
calculation by user

processing specific
processing specific
processing specific
processing specific

RAMPF Group, Inc.


49037 Wixom Tech Drive | Wixom, MI 48393, USA
T +1.248.295.0223 | F +1.248.295.0224
E info.us@rampf-group.com

Our recommendations on the use of the material are based on many years of experience and current scientific and practical knowledge. They are, however, provided without any obligation on our part and do not relieve the buyer of the need for suitability tests. They do not constitute a legal relationship, nor are any protected third party rights what's ever affected thereby.

www.rampf-group.com



Feeds and Speeds for RAKU[®] TOOL WB-0801

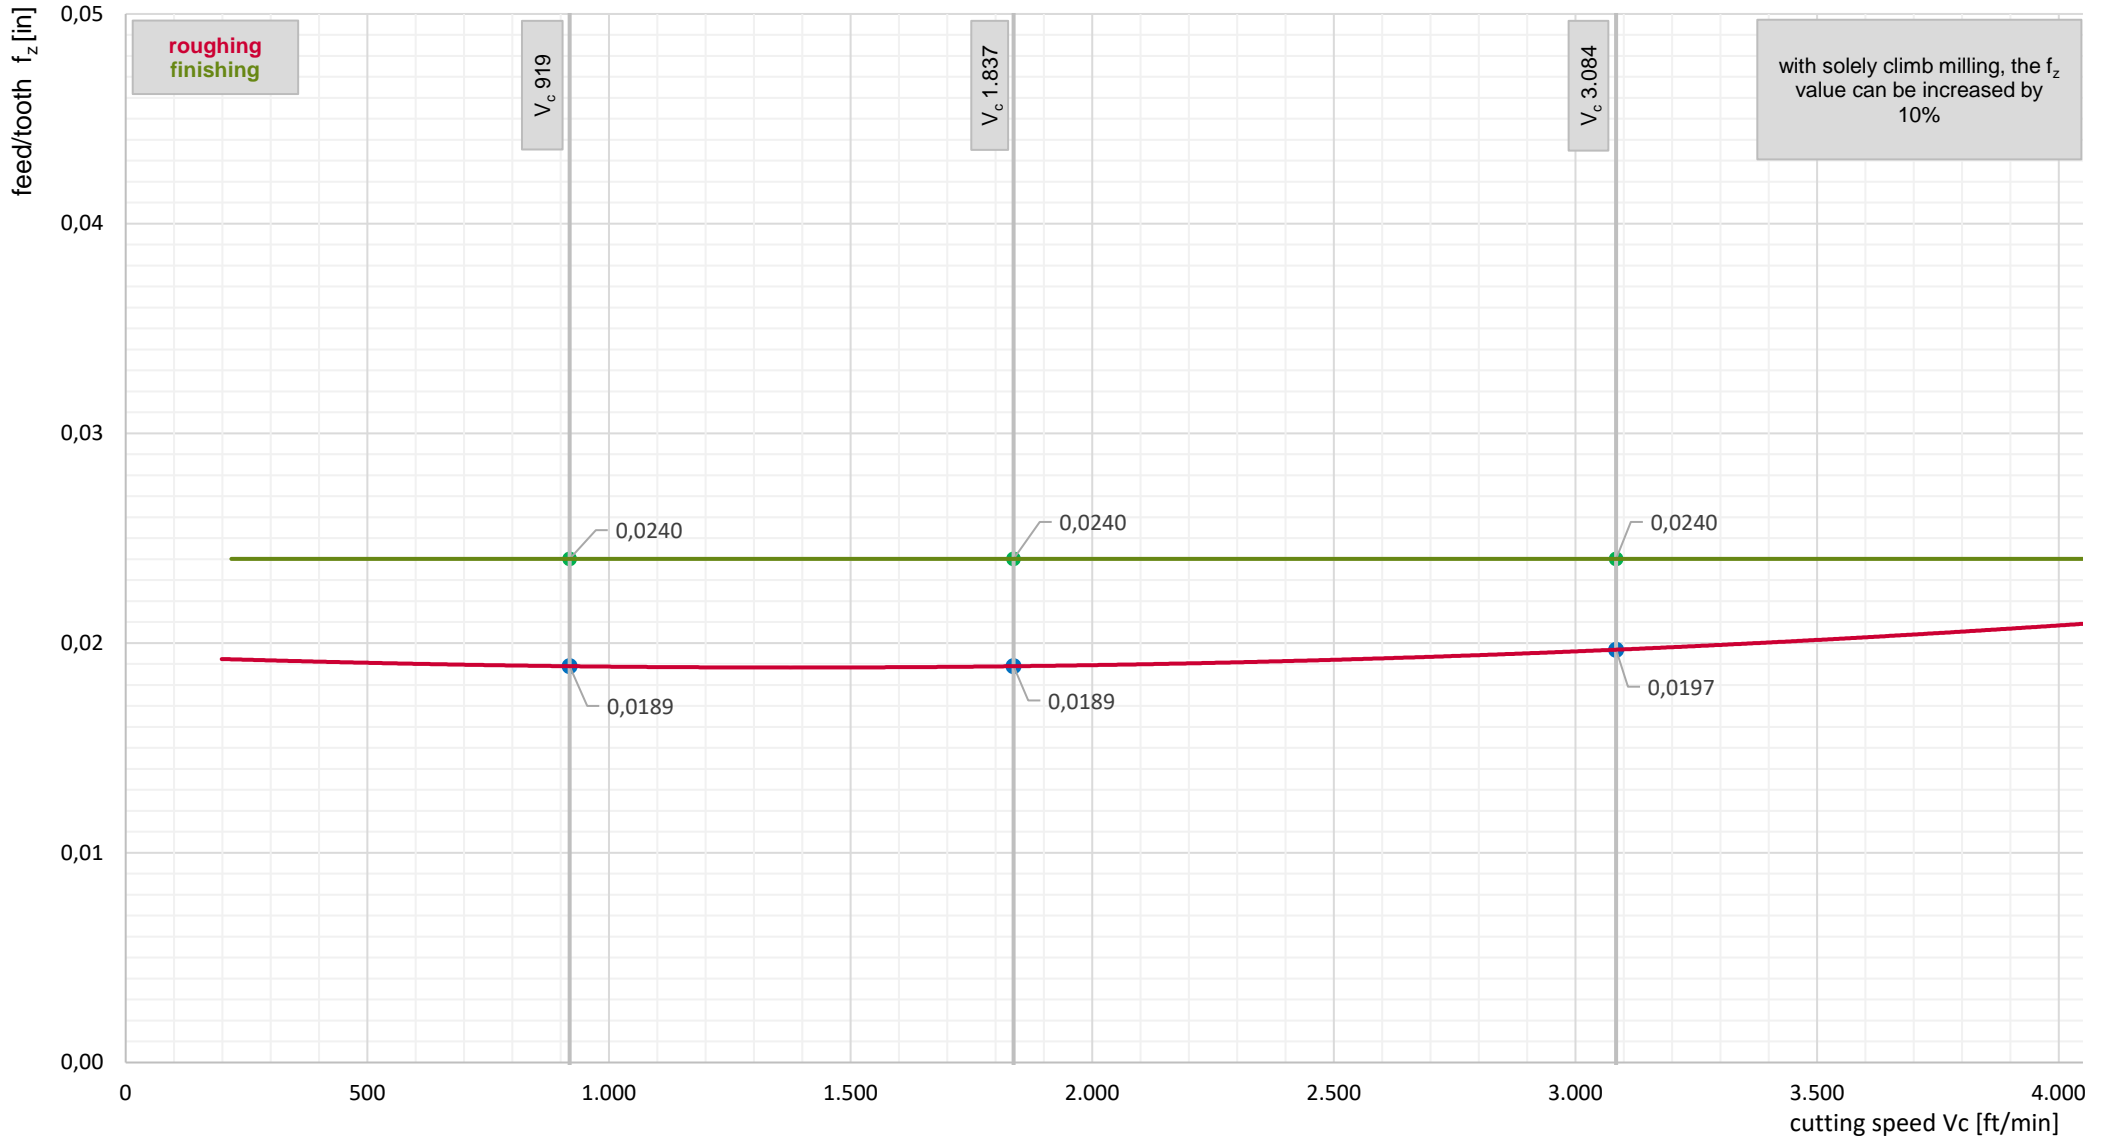

RAMPF Group, Inc.

49037 Wixom Tech Drive | Wixom, MI 48393, USA
T +1.248.295.0223 | F +1.248.295.0224
E info.us@rampf-group.com

Our recommendations on the use of the material are based on many years of experience and current scientific and practical knowledge. They are, however, provided without any obligation on our part and do not relieve the buyer of the need for suitability tests. They do not constitute a legal relationship, nor are any protected third party rights what's ever affected thereby.

www.rampf-group.com



Feeds and Speeds for RAKU[®] TOOL WB-0801



cutting data used on the demonstrator

sequence of processing	processing strategy	a _e [in]	a _p [in]	offset [in]	f _z [in]	V _c [ft/min]
roughing torus D6	vol. roughing following contour	0,118	0,236	0,024	0,019	919
roughing torus D12	vol. roughing following contour	0,236	0,472	0,005	0,019	1837
roughing torus D20	vol. roughing following contour	0,394	0,787	0,079	0,020	3084
finishing ball D6	zigzag stroke milling	0,002	0,024	0,000	0,024	919
finishing ball D12	zigzag stroke milling	0,005	0,047	0,000	0,024	1837
finishing ball D20	zigzag stroke milling	0,008	0,079	0,000	0,024	3084

tools used on the demonstrator

tool manufacturer	tool type	D _c [in]	L ₀ [in]	L ₁ [in]	L ₂ [in]	Z _n [number]
hufschmied-tools.com/de/	PROTO-LINE / torus	¼	2,36	0,91	0,31	2
hufschmied-tools.com/de/	PROTO-LINE / torus	½	3,94	2,17	0,63	2
hufschmied-tools.com/de/	PROTO-LINE / torus	¾	4,09	3,39	0,79	2
hufschmied-tools.com/de/	PROTO-LINE / ball	¼	2,36	0,91	0,39	2
hufschmied-tools.com/de/	PROTO-LINE / ball	½	3,27	2,05	0,41	2
hufschmied-tools.com/de/	PROTO-LINE / ball	¾	4,09	2,64	0,67	2



RAMPF Group, Inc.

49037 Wixom Tech Drive | Wixom, MI 48393, USA
 T +1.248.295.0223 | F +1.248.295.0224
 E info.us@rampf-group.com

Our recommendations on the use of the material are based on many years of experience and current scientific and practical knowledge. They are, however, provided without any obligation on our part and do not relieve the buyer of the need for suitability tests. They do not constitute a legal relationship, nor are any protected third party rights what's ever affected thereby.

www.rampf-group.com