




# formula for calculating speed (spindle)

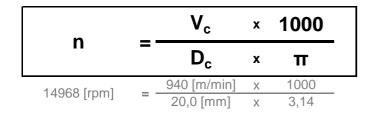

## validated cutting data for roughing

Туре	D <sub>c</sub>	Zn	Vc	f <sub>z</sub>	n	V <sub>f</sub>	a <sub>e</sub>	a <sub>p</sub>	L <sub>1</sub>	L <sub>2</sub>
туре	[mm]	[number]	[m/min]	[mm]	[rpm]	[mm/min]	[mm]	[mm]	[mm]	[mm]
torus	20,0	2	650	1,000	10.350	20.701	10,00	20,00	86,0	20,0
torus	12,0	2	390	1,000	10.350	20.701	6,00	12,00	55,0	16,0
torus	6,0	2	195	1,000	10.350	20.701	3,00	6,00	23,0	8,0

#### validated cutting data for finishing

Type	D <sub>c</sub>	Zn	V <sub>c</sub>	fz	n	V <sub>f</sub>	a <sub>e</sub>	a <sub>p</sub>	L <sub>1</sub>	L <sub>2</sub>
Туре	[mm]	[number]	[m/min]	[mm]	[rpm]	[mm/min]	[mm]	[mm]	[mm]	[mm]
ball	20,0	2	500	1,300	7.962	20.701	2,00	10,00	67,0	17,0
ball	12,0	2	300	1,300	7.962	20.701	1,20	6,00	52,0	10,5
ball	6,0	2	140	1,300	7.431	19.321	0,60	3,00	23,0	10,0

### formula for calculating axis feed rate

V <sub>f</sub>	=	n	x	f <sub>z</sub>	x	<b>z</b> <sub>n</sub>
30000 [mm/min]	=	15000 [rpm]	Х	1,000 [mm]	Х	2 [number]

#### recommended cutting data for roughing

parameter	symbol	unit
radial infeed:	a <sub>e</sub>	[mm]
axial infeed:	a <sub>p</sub>	[mm]
number of teeth:	Zn	[number]

## recommended cutting data for finishing

parameter	symbol	unit
radial infeed:	a <sub>e</sub>	[mm]
axial infeed:	a <sub>p</sub>	[mm]
number of teeth:	Zn	[number]

RAMPF Tooling Solutions GmbH & Co. KG

Robert-Bosch-Straße 8-10 I D-/2661 Grafenberg T +49.71 23.93 42-1600 I F +49.71 23.93 42-1666 E tooling.solutions@rampf-group.com

roughing recommendation				
min.	ideal	max.		
- x D <sub>c</sub>	0,50 x D <sub>c</sub>	0,80 x D <sub>c</sub>		
0,10 x D <sub>c</sub>	1,00 x D <sub>c</sub>	5,00 x D <sub>c</sub>		
1	1	2		

finishing recommendation				
min.	ideal	max.		
- x D <sub>c</sub>	0,10 x D <sub>c</sub>	0,80 x D <sub>c</sub>		
- x D <sub>c</sub>	0,50 x D <sub>c</sub>	1,00 x D <sub>c</sub>		
1	1	2		

parameter	symbol	unit
cutting speed:	V <sub>c</sub>	[m/min]
feed/tooth:	fz	[mm]

speed (spindle):	n	[rpm]
axis feed rate:	V <sub>f</sub>	[mm/mir

cutting diameter:	D <sub>c</sub>	[mm]
tool total length:	L <sub>0</sub>	[mm]
tool unclamping length:	L <sub>1</sub>	[mm]
tool cutting length:	$L_2$	[mm]

user
specifications
selection in the diagram
selection in the diagram


calculation by user
calculation by user

processing specific
processing specific
processing specific
processing specific

Our recommendations on the use of the material are based on many years of experience and current scientific and practical knowledge. They are, however, provided without any obligation on our part and do not relieve the buyer of the need for suitability tests. They do not constitute a legal reationship, nor are any protected third party rights what's ever affected thereby.





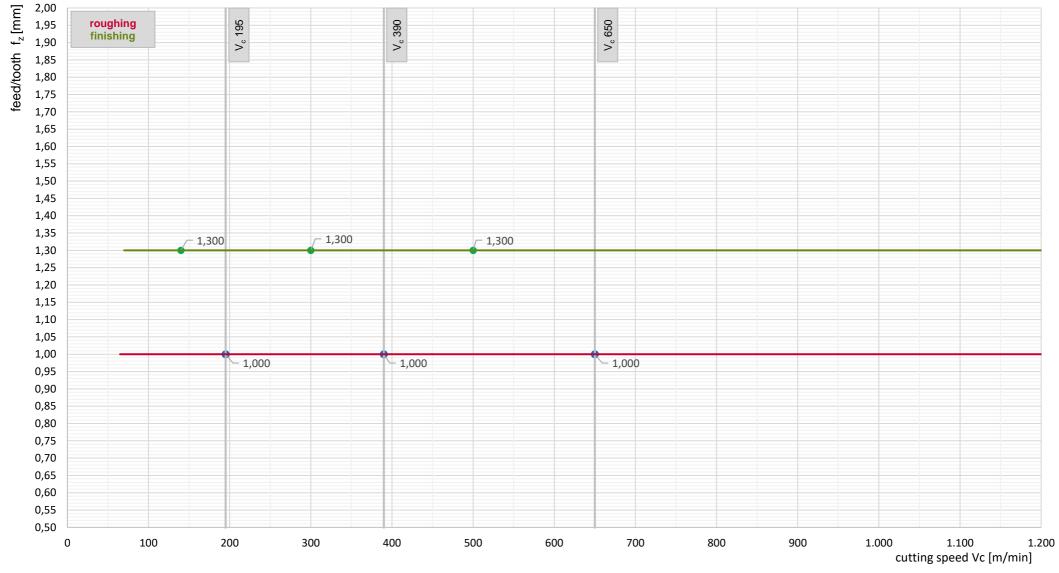

RAMPF Tooling Solutions GmbH & Co. KG

Robert-Bosch-Straße 8-10 I D-/2661 Grafenberg T +49.71 23.93 42-1600 I F +49.71 23.93 42-1666 E tooling.solutions@rampf-group.com Our recommendations on the use of the material are based on many years of experience and current scientific and practical knowledge. They are, however, provided without any obligation on our part and do not relieve the buyer of the need for suitability tests. They do not constitute a legal reationship, nor are any protected third party rights what's ever affected thereby.

www.rampf-group.com





#### cutting data used on the demonstrator

sequence of processing	processing strategy	a <sub>e</sub>	a <sub>p</sub>	offset	fz	Vc
roughing torus D6	vol. roughing following contour	3,00	6,00	0,60	1,00	195
roughing torus D12	vol. roughing following contour	6,00	12,00	0,12	1,00	390
roughing torus D20	vol. roughing following contour	10,00	20,00	2,00	1,00	650
finishing ball D6	zigzag stroke milling	0,60	3,00	0,00	1,30	140
finishing ball D12	zigzag stroke milling	1,20	6,00	0,00	1,30	300
finishing ball D20	zigzag stroke milling	2,00	10,00	0,00	1,30	500

#### tools used on the demonstrator

tool manufacturer	tool type	$D_{c}$	L <sub>0</sub>	L <sub>1</sub>	$L_2$	z <sub>n</sub>
hufschmied-tools.com/de/	PROTO-LINE / Torus	6,0	60,0	23,0	8,0	2
hufschmied-tools.com/de/	PROTO-LINE / Torus	12,0	100,0	55,0	16,0	2
hufschmied-tools.com/de/	PROTO-LINE / Torus	20,0	104,0	86,0	20,0	2
hufschmied-tools.com/de/	PROTO-LINE / Kugel	6,0	60,0	23,0	10,0	2
hufschmied-tools.com/de/	PROTO-LINE / Kugel	12,0	83,0	52,0	10,5	2
hufschmied-tools.com/de/	PROTO-LINE / Kugel	20,0	104,0	68,0	17,0	2



RAMPF Tooling Solutions GmbH & Co. KG

Robert-Bosch-Straße 8-10 I D-/2661 Grafenberg T +49.71 23.93 42-1600 I F +49.71 23.93 42-1666 E tooling.solutions@rampf-group.com Our recommendations on the use of the material are based on many years of experience and current scientific and practical knowledge. They are, however, provided without any obligation on our part and do not relieve the buyer of the need for suitability tests. They do not constitute a legal reationship, nor are any protected third party rights what's ever affected thereby.